




TECHNICAL SPECIFICATION

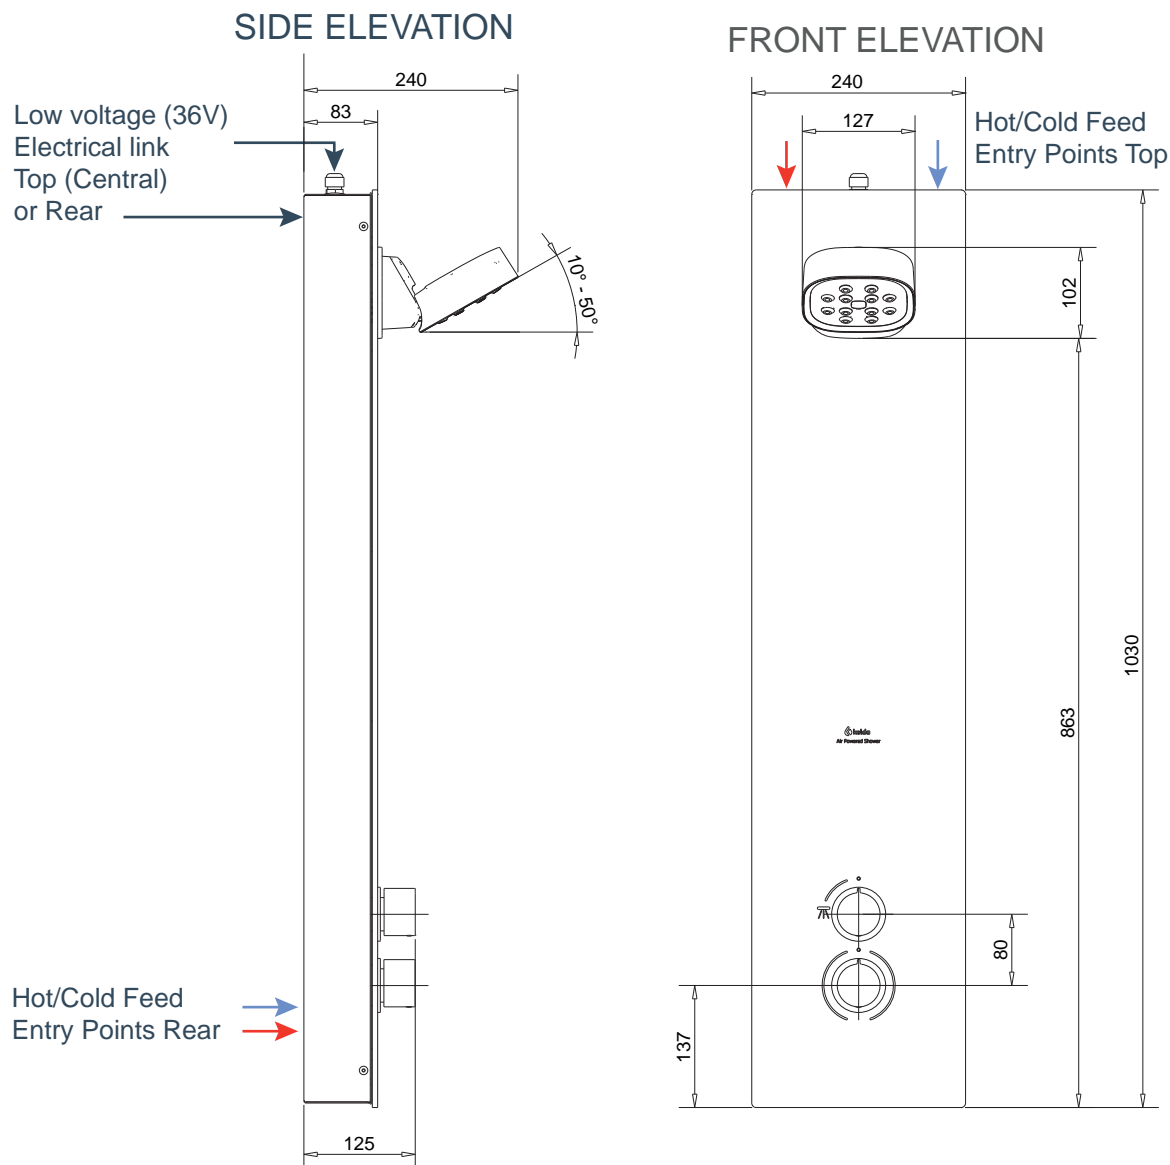

Product Dimensions (mm)

Length:	1030
Width:	240
Depth of Panel:	83
Depth to Head:	240

Installation

Height to Shower Head (mm)
Min: 1800
Max: 1900

Available Flow Rates (SKU No.)

5 lpm:	93007005
6 lpm:	93007006

Electrical

Voltage: 200-240V

Supply Phase: 1

Frequency: 50/60Hz

Enclosure Rating: Transformer IP67, Kelda hub IPX5

Requires 3Amp switched fused spur in dry zone

Fused spur to be connected back to 32A 30mA RCBO

Logistics

Net Weight: 12Kg

Packed Weight: 14Kg

Packaged Dimensions: (H) 1145 x (W) 374 x (D) 224

Construction

Glass: Low Iron Tempered Glass (6mm)

Panel Body: SAE 304 Stainless Steel

Shower Head: Chrome Plated ABS

Shower Faceplate: ABS

Nozzles: TPE

Operation

Wall mounted Panel Shower with adjustable Flex head

Kelda air powered Flex adjustable shower head

Requires hot and cold water supply

Inlet connections 15mm copper pipe or 1/2" BSP

Position of water connection from backside / top

Top feed requires separate instal kit 85001000

Minimum advised working pressure 1 bar

Maximum advised working pressure 5 bar

Thermostatic mixing valve included - TMV2

Maintenance Schedule*

External Surfaces: Daily/Weekly

Showerhead: Quarterly

Internal Descale: Bi-Annually

*Frequency should be adjusted inline with local water hardness and usage levels

Warranty

2 Years (excluding Solenoid)



Certification



For further information please contact Kelda.

+44 (0)2381 290 640

www.keldashowers.com