




TECHNICAL SPECIFICATION

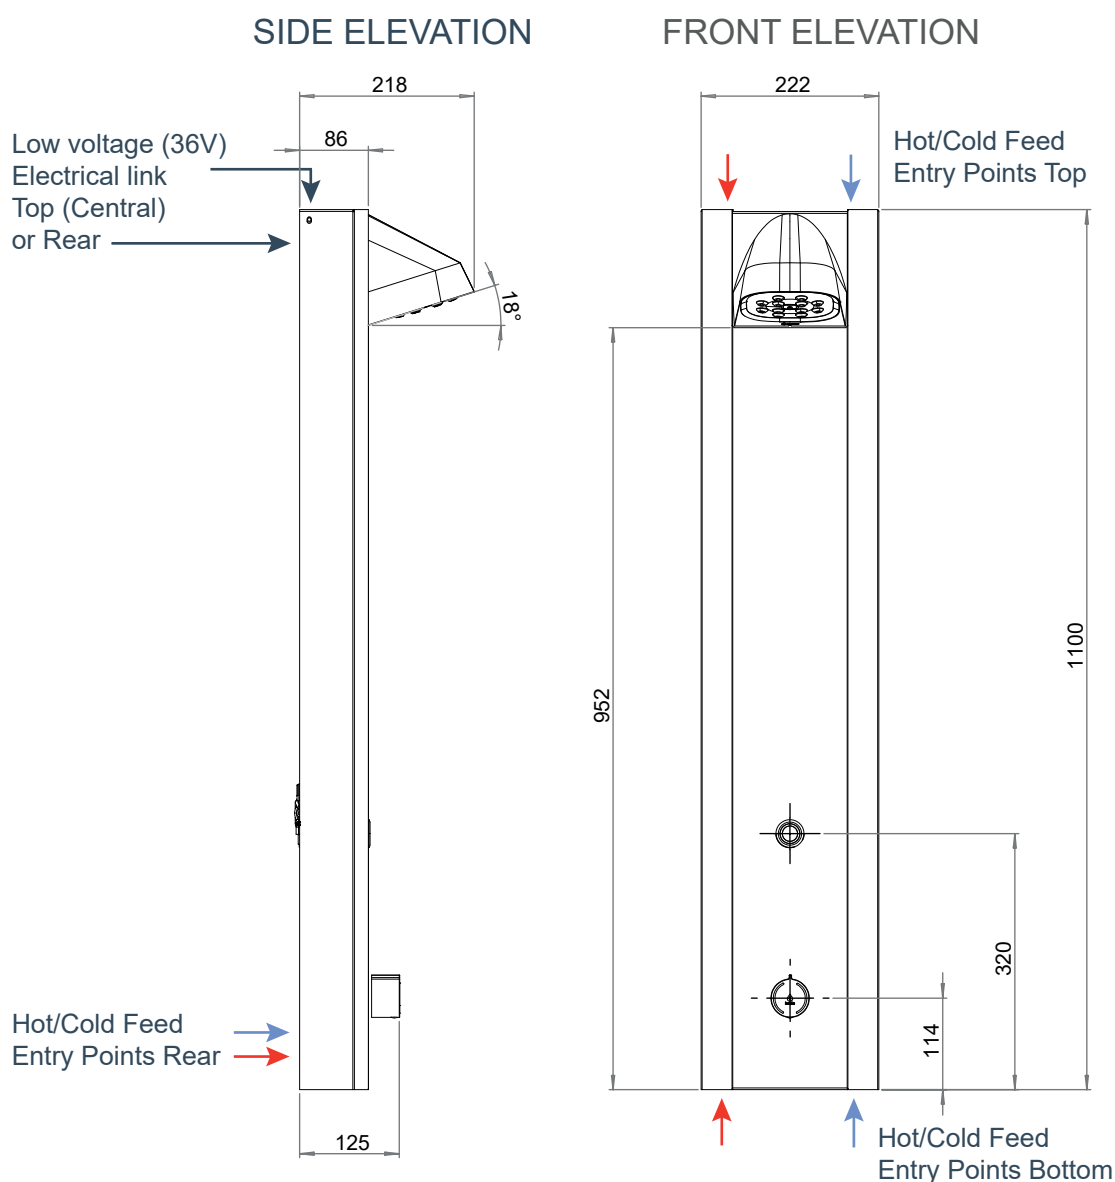

Product Dimensions	(mm)
Length:	1100
Width:	222
Depth of Panel:	86
Depth to Head:	218

Installation
Height to Shower Head (mm)
Min: 1950
Max: 2100

Available Flow Rates
4 lpm: 93011004
5 lpm: 93011005
6 lpm: 93011006

Electrical

Voltage: 200-240V

Supply Phase: 1

Frequency: 50/60Hz

Enclosure Rating: Transformer IP67, Kelda hub IPX5

Requires 3Amp switched fused spur in dry zone

Fused spur to be connected back to 32A 30mA RCBO

Logistics

Net Weight: 9.1Kg

Packed Weight: 11Kg

Packaged Dimensions: (H) 1105 x (W) 225 x (D) 282

Construction

Panel Body: SAE 304 Stainless Steel

Finishes: Brushed Stainless Steel or White Powder Coat

Shower Head: Chrome Plated ABS

Shower Faceplate: ABS

Nozzles: TPE

Operation

Digital Push Button Timed Flow:

5 timer settings are available, 10s, 15s, 30s, 45s, 60s.

These can be adjusted to suit installation preferences.

The default setting is at 30 seconds

See installation guide for details

Minimum advised working pressure 1 bar

Maximum advised working pressure 5 bar

Thermostatic mixing valve included - TMV2

Maintenance Schedule*

External Surfaces: Daily/Weekly

Showerhead: Quarterly

Internal Descale: Bi-Annually

*Frequency should be adjusted inline with local water hardness and usage levels

Warranty

2 Years (excluding Solenoid)



Certification

