

Product Specification

Electrical

Input Voltage:	100–240V 47/63Hz
Output Voltage:	200–240V
Rated Power:	37W (during operation), 1.8W (standby)

Operating Temperature Range: 0°C to +35°C

Enclosure Rating: Transformer IP67, Kelda hub IPX4

- › Requires 3Amp switched fused spur in dry zone
- › Fused spur to be connected back to 32A 30mA RCBO

Logistics

Net Weight:	TBC
Packed Weight:	9.9KG
Packed Dimensions:	(H)700 x (W)390 x (D)200

Construction

Shower Head:	Chrome Plated/ Painted ABS
Shower Faceplate:	ABS
Nozzles:	TPE
Shower Handset:	Chrome plated/ Painted ABS

- › Compatible with any mixing valve

Operation

- › Concealed shower system
- › Kelda air powered flex adjustable shower head
- › Requires hot and cold water supply where valve included
- › Requires blended feed where valve not included
- › Check boiler flow rate suitability for low flow showers
- › Advised working pressure: 1 – 5 bar
- › Valve must be commissioned on-site prior to use where TMV2 Thermostatic mixing valve included

Maintenance Schedule*


External Surfaces:	Daily/ Weekly
Showerhead:	Quarterly
Internal Descale:	Bi-Annually

*Frequency should be adjusted inline with local water hardness and usage levels

Product (Model Shown: 91020100)



Colours Available



007

Glacier White
& Chrome

011

Midnight
Black



Approved materials



Where valve
included


**2-Year
Warranty**

For parts & labour

Complies with BS EN1111:2017 & BS EN1237:2017

Product Dimensions

Model Shown: 91017100

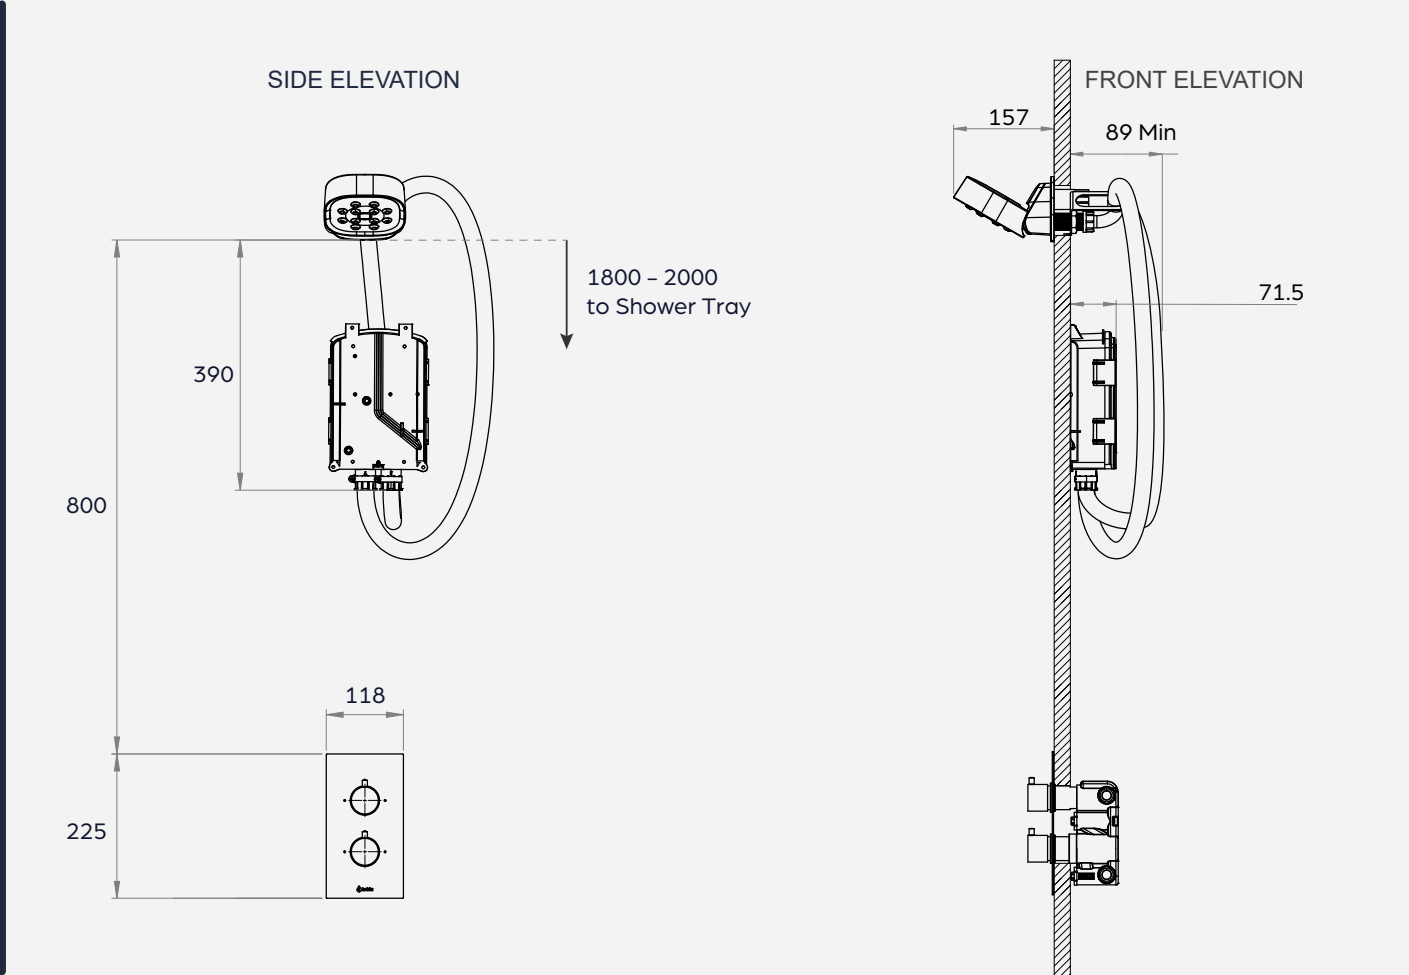

All dimensions in mm.

		Model Options	SKU No.	Flow Rate 5lpm (Sap Qualifier 9XXXXX5)	Flow Rate 6lpm
Control Hub Dimensions (mm) Height: 259 Width: 155 Depth: 72 Height to shower head: 1800 – 2000 *Installation should be completed to suit the user's requirements	Flex Head	Concealed System Kit	91018100	91018105	91018106
		Concealed System	91021100	91021105	91021106
		Concealed System + eHandset	91020100	91020105	91020106
		Concealed System + Riser Set	91017100	91017105	91017106
	Fixed Head	Concealed System Kit	91019100	91019105	91019106
		Concealed System	91016100	91016105	91016106
		Concealed System + Timed Flow	91027100	91027105	91027106

Product Schematic

Model Shown: 91020100

