

Product Specification

Electrical

- › Input Voltage: 100–240V 47/63Hz
- › Output Voltage: 200–240V
- › Rated Power: 37W (during operation), 1.8W (standby)
- › Operating Temperature Range: 0°C to +35°C
- › Enclosure Rating: Transformer IP67, Kelda hub IPX4
- › Requires 3Amp switched fused spur in dry zone
- › Fused spur to be connected back to 32A 30mA RCBO

Logistics

- › Net Weight: 12kg
- › Packed Weight: 14kg
- › Packed Dimensions: (H) 1145 x (W) 374 x (D) 224

Construction

- › Glass: Low Iron Tempered Glass (6mm)
- › Panel Body: SAE 304 Stainless Steel
- › Shower Head: Chrome Plated ABS
- › Shower Faceplate: ABS
- › Nozzles: TPE

Operation

- › Wall mounted Panel Shower with adjustable Flex head
- › Kelda air powered Flex adjustable shower head
- › Requires hot and cold water supply
- › Inlet connections 15mm copper pipe or 1/2" BSP
- › Position of water connection from backside / top
- › Top feed requires separate instal kit 85001000
- › Minimum advised working pressure 1 bar
- › Maximum advised working pressure 5 bar
- › Thermostatic mixing valve included – TMV2

Maintenance Schedule*

- › External Surfaces: Daily/Weekly
- › Showerhead: Quarterly
- › Internal Descale: Bi-Annually

*Frequency should be adjusted inline with local water hardness and usage levels

Warranty

- › 2 Years




Approved Materials



Where valve included



Product Dimensions

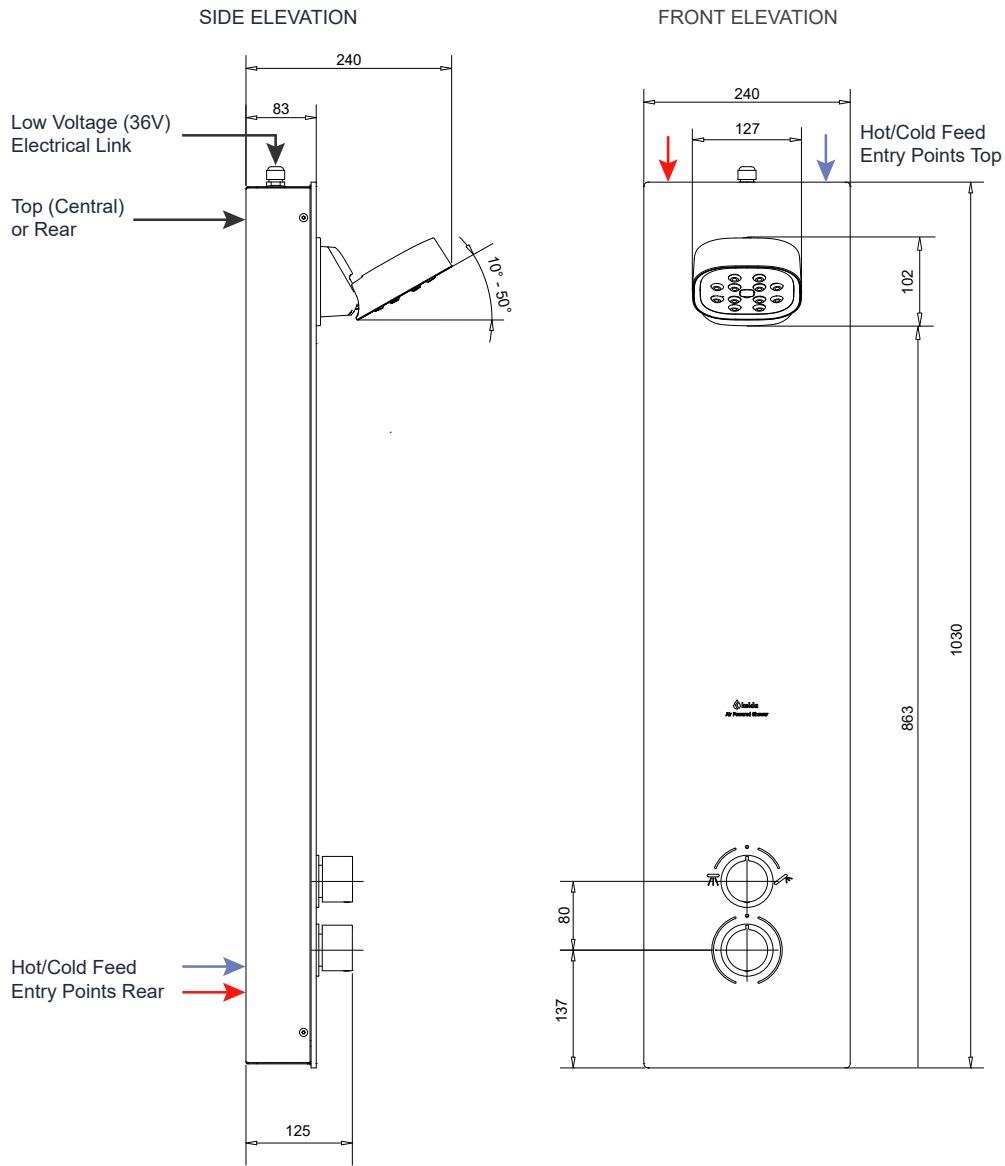

Product Dimensions (mm)		Installation* (mm)		Flow Rates (SKU No.)	
> Length:	1030	> Height to Shower Head:	2000	> 5 lpm	91020105
> Width:	240	> Min:	1800	> 6 lpm	91017105
> Depth of Panel:	83	> Max:	1900		
> Depth to Head:	240				

*Installation should be completed to suit the user's requirements